




“What Do You Use For Power?”™

IB05Z & IB10Z Series Product Announcement



- Meets **DoE Efficiency Level VI***
- Ultra-Compact, Light Weight
- Output Available with 5 Ft. Output Cable or USB Receptacle
- AC Interchangeable Prongs Mountable in All 4 Directions (U.S. E.U. U.K. A.U.)

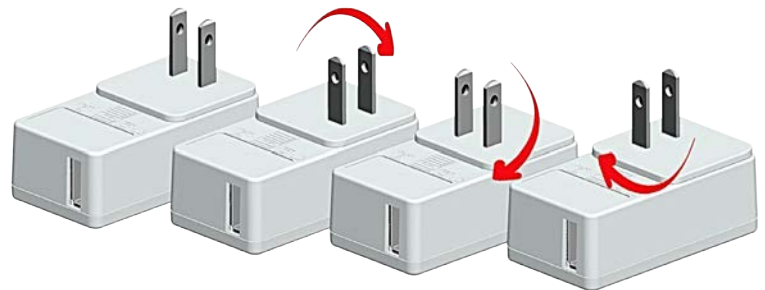

- Suitable for All Consumer Products, Mobile/Field Instruments, or Applications Needing 5 & 10 Watts of Power.

Specs at a Glance

Input Voltage	90 - 264 Vac
Output Power:	5 Watts 5 & 10 Watts
Output Voltage: Cable	5 - 24 Vdc
USB	5 Vdc
Output Current: Cable	0.2 - 1.0 A
USB	0.5 A, 1.0 A, 2.0 A
MTBF	100,000 Hrs. Min.
Dimensions: 5 Watt	72.9 x 38.9 x 17.8 mm
(L x W x H) 10 Watt	73.2 x 39.1 x 21.2 mm
Weight (Base): 5 Watt	40 g
10 Watts	47 g



* 5 Watts only

[Click Here for a detailed spec sheet on our website!](#)



TECHNOLOGIES INC.

(516) 433-1313

www.apxonline.com

sales@apxonline.com