



SM108Q1R – SM120Q1R Series

108 - 120 Watt AC-DC Medical Desktop Power Supply
IEC 60601-1-2 4th Ed. EMC, Energy Efficiency Level VI

Date: 4/3/17

Rev: 040317

Page: 1 of 1





The SM108Q1R – SM120Q1R Series switch mode power supply offers 108 Watts to 120 Watts output power, with an output voltage range of 12 Vdc – 48 Vdc. Case style is a desktop enclosure with choice of IEC-320 C6, C8, C14, or C18 input socket, with ES, EN and IEC 60601-1 3.1 Edition safety approvals, IEC 60601-1-2 4th Edition EMC and IEC 60950-1 2nd Edition Safety approval, and Energy Efficiency Level 6.




Features:

- Universal Input 100 - 240 Vac
- IEC 320 C18, C14, C8, and C6 Input
- Over-Voltage Protection
- Over-Current Protection
- Short Circuit Protection
- 100% Burn-In
- RoHS 2 Compliant
- Energy Efficiency Level: VI
- Meets IEC 60950-1 2nd Edition
- Meets IEC 60601-1-2: 2014 4th Edition EMC Requirements

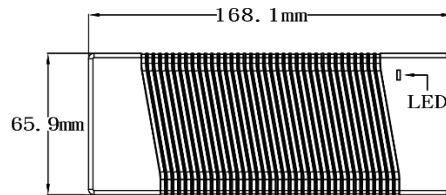

SM□□□Q1R□□□R

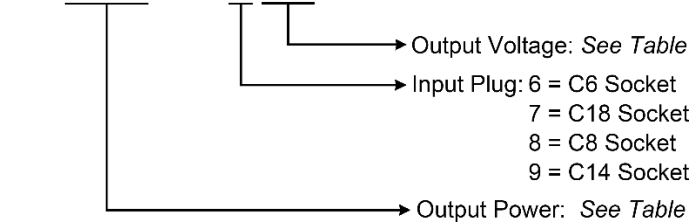

Electrical Information

Input Voltage	90 to 264 Vac
Input Frequency	47 to 63 Hz
Input Current	0.5 – 1.4 A
Over-Voltage Protection	Unit is protected from over-voltage conditions
Over-Current Protection	Unit is protected from over-current conditions
Hold-Up Time	10 ms
Operating Temperature	0 - 40°C
Storage Temperature	-20 - 80°C
Weight	590 g (Ref.)
Industry Compliance	RoHS 2, Energy Efficiency Level VI
EMC Requirements	IEC 60601-1-2: 2014 4 th Edition
EMI Requirements	Meets Conduction and Radiation Limits of: Class B: FCC Part 18, CISPR-11, EN 55011
Safety Compliance	UR/c-UR (ES60601-1: 3.1 Edition), TUV T- Mark (EN/IEC 60601-1: 3.1 Edition), CE, PSE, CB (IEC 60601-1: 3.1 Edition, IEC 60950-1: 2 nd Edition)

Output Voltage	Output Current	Output Power (Max.)
12 Vdc	9.00 A	108 W
15 Vdc	8.00 A	120 W
18 Vdc	6.67 A	120 W
19 Vdc	6.32 A	120 W
20 Vdc	6.00 A	120 W
24 Vdc	5.00 A	120 W
48 Vdc	2.50 A	120 W

Note: Output connector to be specified by customer. APX will be happy to recommend the appropriate connector for your application needs. The cable length and wire gauge will be dependent on the Energy Efficiency level requirements.



TECHNOLOGIES INC.
HICKSVILLE, NEW YORK

264 Duffy Avenue
Hicksville, NY 11801

Tel: (516) 433-1313
Fax: (516) 433-1457

Web: www.apxonline.com
Email: sales@apxonline.com

Specification subject to
change without notice