

45 - 65 Watts

Highlights:

- ✓ 45 - 65 W output power
- ✓ 3.3 - 57 Vdc
- ✓ US, EU, AUS, UK, China AC input
- ✓ RoHS, REACH, DoE VI, CoC v5 Tier 2 compliant
- ✓ Certified: UL/CUL|CE|RCM|PSE|CCC|PSB|EAC|BIS
- ✓ 3 Year Warranty
- ✓ Can be modified or customized for an exact fit solution




Output voltage and current

Output Voltage Range:	Output Current:	Output Power:
3.3 - 5 Vdc	9 A Max	45 W Max
5.1 - 8 Vdc	8 A Max	64 W Max
8.1 - 24 Vdc	5 A Max	65 W Max
24.1 - 57 Vdc	2.7 A Max	65 W Max

Electrical Characteristics

Input Voltage & Frequency:	90 - 264 Vac (47 - 63 Hz)
Input Current:	1.5 A Max
Leakage Current:	Class I: 3.5mA Max. Class II: 0.25mA Max.
Ripple & Noise (PK-Pk):	1% of O/P voltage
Operating Temperature:	-20°C to +40°C
Efficiency:	DoE Level 6 (VI) CoC v5 Tier 2
Withstanding Voltage:	Input to Output: 3000 VAC
Mean Time Between Failure (MTBF):	100,000 Hrs Min. (Telcordia SR-332)
Protections:	Short Circuit Protection, Over-voltage Protection, Over-current Protection, Over-temperature Protection
Industry Compliance:	Directive (EU) 2015/863 (RoHS 3), REACH, DoE VI, EC 2019/1782, CoC v5 Tier 2
EMI/EMC Requirements:	FCC Part 15 Class B, EN 55032 Class B, AS/NZS CISPR-32 Class B, J55032(H29), ICES-003, EN 55035, EN/IEC 61000-3-2, -3-3
Safety Compliance:	UL/CSA 62368 Ed. 3, EN 62368 Ed. 2, AS/NZS CISPR 32: 2015, SAA (AS/NZS 62368.1:2018 ed.3), J 62368 Ed. 3, GB 17625.1-2022, GB 4943.1-2022, IEC 60950

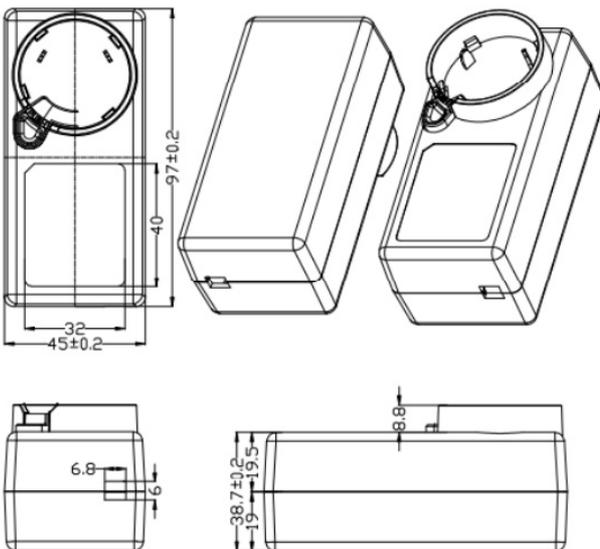

Not seeing what you are looking for? Contact us:

Tel. (516) 433-1313 · 264 Duffy Avenue, Hicksville, New York 11801 · www.apxonline.com · Email: sales@apxonline.com