

SM250P Desktop Series

Medical - Desktop



230 - 250 Watts

Highlights:

- ✓ 230 - 250 W output power
- ✓ 12 - 48 Vdc
- ✓ IEC320 C14 AC input
- ✓ RoHS, REACH, DoE VI, CoC v5 Tier 2
- ✓ 2x MOPP Protection, Suitable for BF applications
- ✓ Certified: UR/CUR|CE
- ✓ 5 Year Warranty
- ✓ Can be modified or customized for an exact fit solution





Output voltage and current

Output Voltage Range:	Output Current:	Output Power:
12 - 12 Vdc	19.16 A Max	230 W Max
19 - 19 Vdc	13.15 A Max	250 W Max
24 - 24 Vdc	10.41 A Max	250 W Max
30 - 30 Vdc	8.32 A Max	250 W Max
36 - 36 Vdc	6.94 A Max	250 W Max
48 - 48 Vdc	5.2 A Max	250 W Max

Electrical Characteristics

Input Voltage & Frequency:	90 - 264 (47 - 63 Hz)
Input Current:	1.4 A Max
Leakage Current:	0.25mA Max.
Ripple & Noise (Pk-Pk):	120 - 480 mV
Operating Temperature:	-10°C to +70°C (Derated linearly from 100% @ +40°C to 50% @ +70°C)
Efficiency:	DoE Level 5 (V)
Withstanding Voltage:	Input to Output: 4000 VAC
Mean Time Between Failure (MTBF):	600,000 Hrs Min. (Telcordia SR-332)
Protections:	Short Circuit Protection, Over-voltage Protection, Over-current Protection, Over-temperature Protection
Industry Compliance:	Directive (EU) 2015/863 (RoHS 3), REACH, DoE VI, EC:2019/1782, CoC v5 Tier 7
EMI/EMC Requirements:	FCC Part 18 Class B, EN 55011 Class B, J55032(H29), ICES-003, EN 55035, EN/IEC 61000-3-2, -3-3
Safety Compliance:	UR/CUR:60601(3.1), UR/CUR:60601(3.2), EN:60601(3.1), EN:60601(3.2), PSE

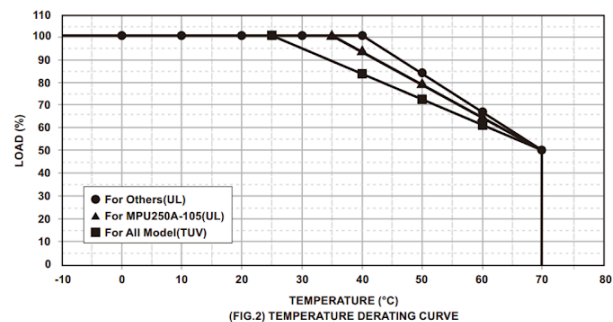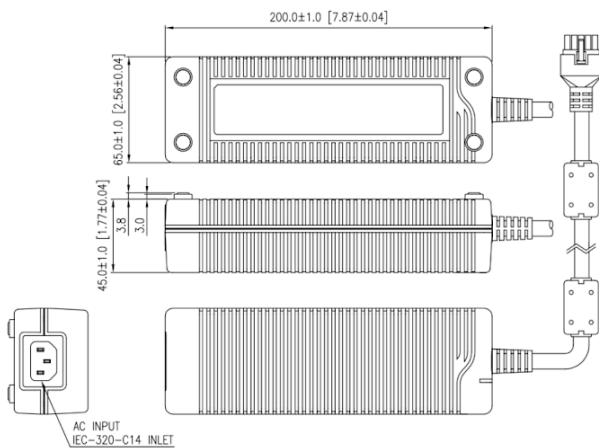

Not seeing what you are looking for? Contact us:

Tel. (516) 433-1313 · 264 Duffy Avenue, Hicksville, New York 11801 · www.apxonline.com · Email: sales@apxonline.com