

54 - 65 Watts

### Highlights:

- ✓ 54 - 65 W output power
- ✓ 8 - 48 Vdc
- ✓ IEC320 C14, C8, C6 AC input options
- ✓ RoHS, REACH, DoE VI, CoC v5 Tier 2 compliant
- ✓ 2x MOPP Protection, Suitable for BF applications
- ✓ Certified: UL/CUL|UR/CUR|CE|PSE|CCC
- ✓ 3 Year Warranty
- ✓ Can be modified or customized for an exact fit solution





### Output voltage and current

Output Voltage Range:	Output Current:	Output Power:
8 - 9 Vdc	6.75 A Max	54 W Max
12 - 48 Vdc	5.42 A Max	65 W Max

### Electrical Characteristics

Input Voltage & Frequency:	70 - 264 (47 - 63 Hz)
Input Current:	0.75 A Max
Leakage Current:	0.1mA Max.
Ripple & Noise (Pk-Pk):	100 - 200 mV
Operating Temperature:	-40°C to +70°C (Derated linearly from 100% @ +40°C to 50% @ +70°C)
Efficiency:	DoE Level 6 (VI) EC:2019/1782 CoC v5 Tier 2
Withstanding Voltage:	Input to Output: 4000 VAC
Mean Time Between Failure (MTBF):	1,000,000 Hrs Min. (Telcordia SR-332)
Protections:	Short Circuit Protection, Over-voltage Protection, Over-current Protection, Over-temperature Protection
Industry Compliance:	Directive (EU) 2015/863 (RoHS 3), REACH, DoE VI, EC:2019/1782, CoC v5 Tier 2
EMI/EMC Requirements:	FCC Part 18 Class B, EN 55011 Class B, FCC Part 15 Class B, EN 55032 Class B, J55032(H29), ICES-003, EN 55035, EN/IEC 61000-3-2, -3-3, GB 17625.1-2022
Safety Compliance:	UL/CSA:62368(Ed.3), UR/CUR:60601(3.1), UR/CUR:60601(3.2), EN:62368(Ed.3), EN:60601(3.1), EN:60601(3.2), J:62368(Ed.3), GB:4943.1-2022

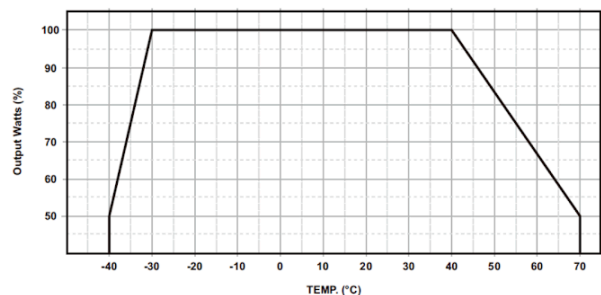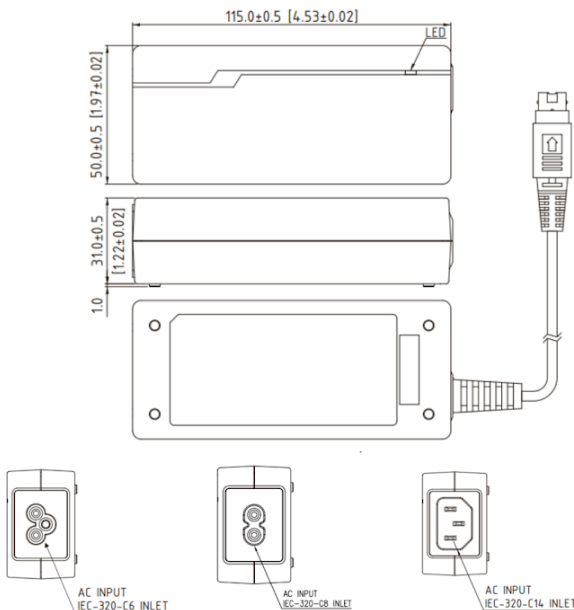

Not seeing what you are looking for? Contact us:

Tel. (516) 433-1313 · 264 Duffy Avenue, Hicksville, New York 11801 · [www.apxonline.com](http://www.apxonline.com) · Email: [sales@apxonline.com](mailto:sales@apxonline.com)